

Q-250

Semi-Automatic Stretch Wrapping System

Productivity

Maintenance free user friendly design to replace handwrapping.

Performance


- Delivers consistent load containment.



Q-250

Protection

- Easily wraps irregular-shaped loads, with no film punctures.

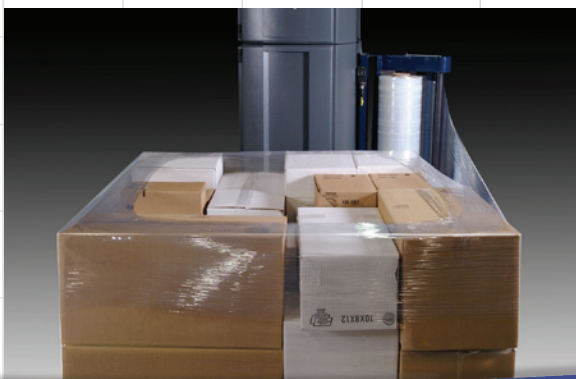

Q-250

Q-250

- Ergonomics
- Safety
- Consistent Wraps
- Complete Containment

Typical Customer

- Less than 20 loads per day.
- Inboard load conditions.
- Irregular shaped loads.
- Uses forklift / pallet jack to load stretch wrapper.



***Eliminate the dizzy effects
of handwrapping.***

Q-250 Specifications

PERFORMANCE CRITERIA

- | | |
|--|-------------------------|
| ■ Production Speed
based on 80" load height; 2 film layers and 12 revolutions | up to 25 loads per hour |
| ■ Maximum Load Diagonal | 73.5"+ |
| ■ Maximum Load Height | 80" * |
| ■ Maximum Load Weight | 3500 lbs. |

LOAD HANDLING SYSTEM

- | | |
|-----------------------------|--------------|
| ■ Turntable Drive | 1/2 HP TEFC |
| ■ Turntable Speed | 1-8 RPM |
| ■ Turntable, Smooth Top | 65" Diameter |
| ■ Turntable Bearing Support | 48" Diameter |

FILM DELIVERY SYSTEM

- | | |
|------------------------|---------------------------------------|
| ■ Roller-Stretch® Plus | 60% Average |
| ■ Wrapping Force | Variable Control |
| ■ Film Capacity | 10" Roll Diameter, 20" Film Web Width |

MACHINE SHIPPING WEIGHT

- | | |
|--|-------------------------------------|
| ■ Machine Size | 67"W x 109"L x 93"H (excludes ramp) |
| ■ Shipping Weight (including skid - approximate) | 1650 lbs. (excludes ramp) |

ELECTRICAL REQUIREMENTS

- | | |
|-------------------|--------------|
| ■ Machine Voltage | 115V, 20 Amp |
|-------------------|--------------|

SERVICE SUPPORT

- | | |
|--------------|--------------------------------------|
| PHONE NUMBER | 24 hrs/7 days a week
800-866-0322 |
|--------------|--------------------------------------|

